

CED/DAA RangeCart Pro

INSTRUCTIONS FOR ASSEMBLY

The new CED/DAA RangeCart Pro was created from the ground up with the practical shooter in mind. It is designed to be the perfect companion product for our RangePack Pro backpack, but can be ideally used with practically any range bag owned.

Made of rugged top quality aluminum, with steel joints and hinges, and wide

inflatable all-terrain tires, the RangeCart Pro can securely carry over 100 lbs. of gear anywhere you need to go!

Quick release assembly pins allow the cart to fold down in seconds, making it possible to pack into any moderately sized suitcase or the smallest car trunk. Even the wheels can be removed. You never need to leave it behind!


Weight: 3.5kgs (7.5 lbs)

Wheel-Base: 42cm (16.8")

Handle Height: 113cm (45.2")

Parts included:

- Upper frame with rubber grip and fabric panel attached
- Lower frame
- Axle
- Wheel pins (2x)
- Pneumatic Wheels (2x)

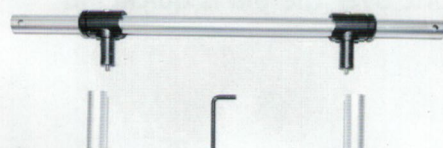


Features:

- Detachable pneumatic 8" wheels and custom rubber grip handle
- I680D custom designed fabric panel
- Ammunition loading shelf
- Two Magazine storage pouches
- Insulated zippered compartment for food or accessories
- Two 1 Liter insulated beverage holders
- Golf umbrella holder (position closed or open)
- Detachable custom aluminum frame for ease in transport
- Velcro connection strap (red)


ASSEMBLY

- WARNING** - Make sure that there is sufficient air in the wheels. Use a hand pump to add air as needed. **DO NOT** over-inflate the wheels. **DO NOT USE** an air compressor to add air to the wheels as compressors tend to inflate too rapidly which in turn could cause the wheel to explode cracking the rim or causing injury to those near by.
- The upper frame should be packaged with the fabric panel attached already. We suggest that the user leave the panel attached to this upper frame at all times. It will make assembly of the lower frame easier and faster. Lay the upper and lower frame on a flat surface and using both hands, insert the fabric panel side rails onto the lower aluminum frame structure. Slide fabric panels down the lower frame evenly on both sides until you are able to insert the top aluminum frame end tips into the lower frame housing. Continue to pull the fabric panel down the frame until the top portion, which is snapped around the top rail is taut.
- There are two insert pins, (one on each side of the fabric panel) attached to the panel to


prevent them from being lost in use. Separate the locking loop from the pin to allow it to be inserted into the frame, connecting the upper frame body to the lower frame structure. After complete insertion, clip the locking loop back onto the pin, locking it in place and securing the frame for use. (see pictures)

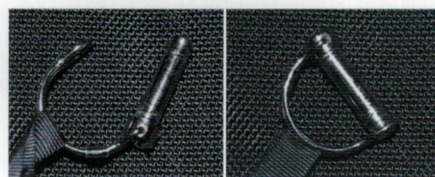

- Attach the axle to the lower aluminum frame structure, using the Hex Key to tighten the axle to the frame. Hand tighten the Hex screw until snug. This should be sufficient to prevent the axle from dislodging during use. (see picture)

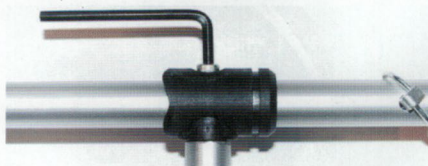

- Attach each wheel to the end of the axle and insert the wheel pin onto the axle and flip the pin ring over the end of the axle to lock it in place. (see picture).

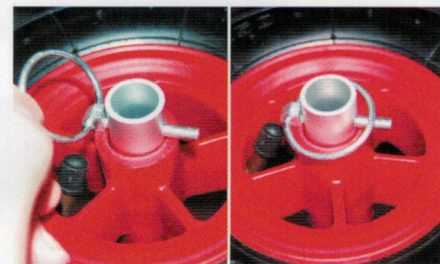

- Stand the RangeCart Pro upright, extending the lower ground guard to an opened position to provide balance of the cart while in an upright position. The cart is now assembled and ready for use.
- A red Velcro connection strap is included with the cart. This strap is custom designed for use with the CED/DAA RangePack Pro Backpack allowing it to be connected to the cart while in use. This strap can also be used with various CED Range bags as well for this purpose.

Double-Alpha Academy B.V.

Elzenweg 33b

5144MB Waalwijk, Netherlands

E: daa@doublealpha.biz

T: +31 416 660 464

F: +31 416 392 040

www.doublealpha.biz

Alpha Dynamics USA LLC

2908 Betz Court

Orefield, PA 18069

E: sales@doublealpha.biz

T: (888) 628-3233

www.doublealpha.biz

Competitive Edge Dynamics Ltd

Room 04, 6th Floor, Hewlett Centre,

54 Hoi Yuen Road, Kwun Tong

KOWLOON, HongKong


E: info@CEDhk.com

T: (852) 2866 6802

www.CEDhk.com

CED/DAA RangeCart Pro

A few more important assembly tips!

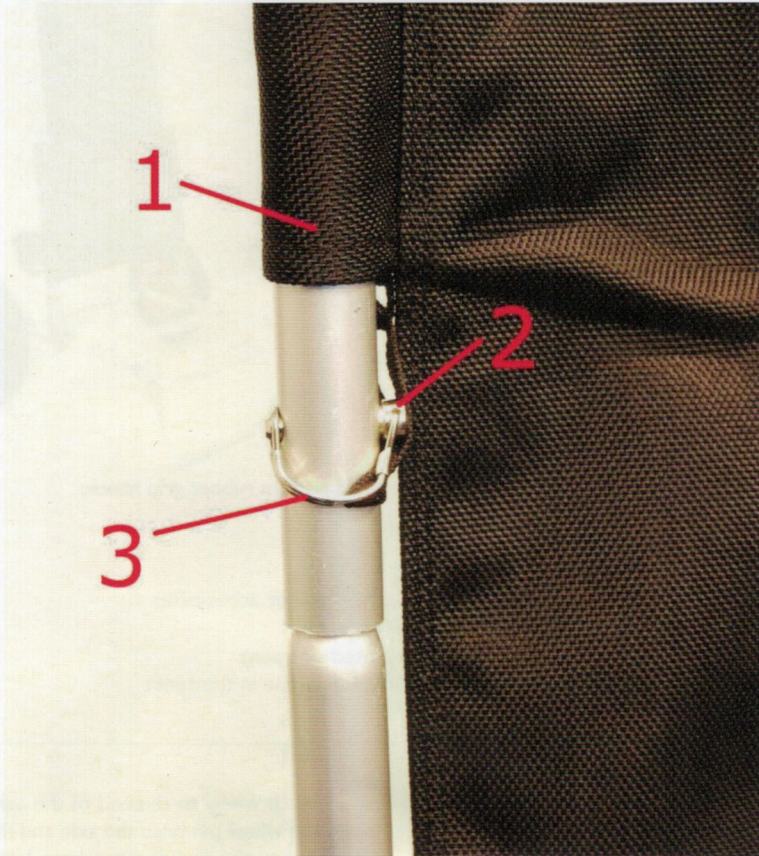

The middle loop in the fabric panel (1) may need to slide down over the assembly pin to pull tight.

This is much easier to do if you assemble the pins from the inside out – so that the head of the pin (2) is on the inner side, close to the fabric.

Also – after clicking the pin's locking loop (3) into place, make sure that it is laying down flat against the aluminum tubing, as shown in the pictures here.

Once the pin is assembled in this manner, sliding the fabric over the pin is quick and easy.



In the insulated zippered pocket you will find the hex key needed for assembly, as well as a red Velcro strap.

This strap can be used as shown here, to secure your RangePack Pro to your cart, utilizing the eyelets conveniently positioned on the RangePack Pro.

Double-Alpha Academy B.V.

Elzenweg 33b
5144MB Waalwijk, Netherlands
E: daa@doublealpha.biz
T: +31 416 660 464
F: +31 416 392 040
www.doublealpha.biz

Alpha Dynamics USA LLC

2908 Betz Court
Orefield, PA 18069
E: sales@doublealpha.biz
T: (888) 628-3233
www.doublealpha.biz

Competitive Edge Dynamics Ltd

Room 04, 6th Floor, Hewlett Centre,
54 Hoi Yuen Road, Kwun Tong
KOWLOON, HongKong
E: info@CEDhk.com
T: (852) 2866 6802
www.CEDhk.com